


WYPYCHACZ ODSADZANY HARTOWANY

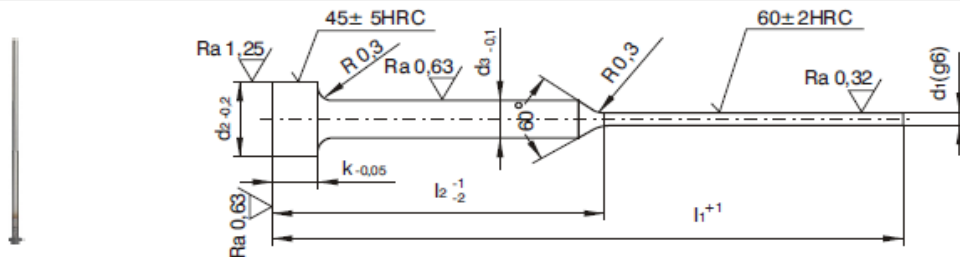

OH

Mat: 1.2210

DIN 1530 FORM C-WS
250° C

d1	d2	d3	k	NR KAT.				
				l1=80	l1=100	l1=125	l1=160	l1=200
				l2=35	l2=50	l2=50	l2=75	l2=75
0,8	4	2	2	OH-080080	OH-080100	OH-080125	OH-080160	
0,9				OH-090080	OH-090100	OH-090125	OH-090160	
1,0				OH-100080	OH-100100	OH-100125	OH-100160	
1,1				OH-110080	OH-110100	OH-110125	OH-110160	
1,2				OH-120080	OH-120100	OH-120125	OH-120160	
1,3				OH-130080	OH-130100	OH-130125	OH-130160	
1,4				OH-140080	OH-140100	OH-140125	OH-140160	
1,5	6,0	3	3	OH-150080	OH-150100	OH-150125	OH-150160	OH-150200
1,6				OH-160080	OH-160100	OH-160125	OH-160160	OH-160200
1,7				OH-170080	OH-170100	OH-170125	OH-170160	OH-170200
1,8				OH-180080	OH-180100	OH-180125	OH-180160	OH-180200
1,9				OH-190080	OH-190100	OH-190125	OH-190160	OH-190200
2,0				OH-200080	OH-200100	OH-200125	OH-200160	OH-200200
2,1				OH-210080	OH-210100	OH-210125	OH-210160	OH-210200
2,2				OH-220080	OH-220100	OH-220125	OH-220160	OH-220200
2,3				OH-230080	OH-230100	OH-230125	OH-230160	OH-230200
2,4				OH-240080	OH-240100	OH-240125	OH-240160	OH-240200
2,5					OH-250100	OH-250125	OH-250160	OH-250200
2,6					OH-260100	OH-260125	OH-260160	OH-260200
2,7					OH-270100	OH-270125	OH-270160	OH-270200
2,8					OH-280100	OH-280125	OH-280160	OH-280200
2,9		OH-290100	OH-290125	OH-290160	OH-290200			